


(19) World Intellectual Property Organization
International Bureau

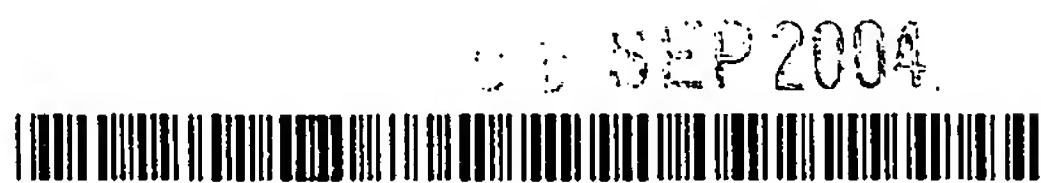

(43) International Publication Date
25 September 2003 (25.09.2003)

(10) International Publication Number
WO 03/078328 A1

PCT

(51) International Patent Classification⁷: C02F 1/00

(21) International Application Number: PCT/GB03/00985

(22) International Filing Date: 7 March 2003 (07.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0205893.1 13 March 2002 (13.03.2002) GB

(71) Applicant (*for all designated States except US*): OTV SA [FR/FR]; L'Aquarene, 1, Place Montgolfier, F-94417 St. Maurice (FR).

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** UNDERWOOD, Lee [GB/GB]; 95 Marys Mead, Hazlemere, High Wycombe HP15 7DT (GB).

(74) Agent: MURGITROYD & COMPANY; Scotland House, 165-169 Scotland Street, Glasgow G5 8PL (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, **MZ**, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, **GR**, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **ML**, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WATER PURIFICATION APPARATUS

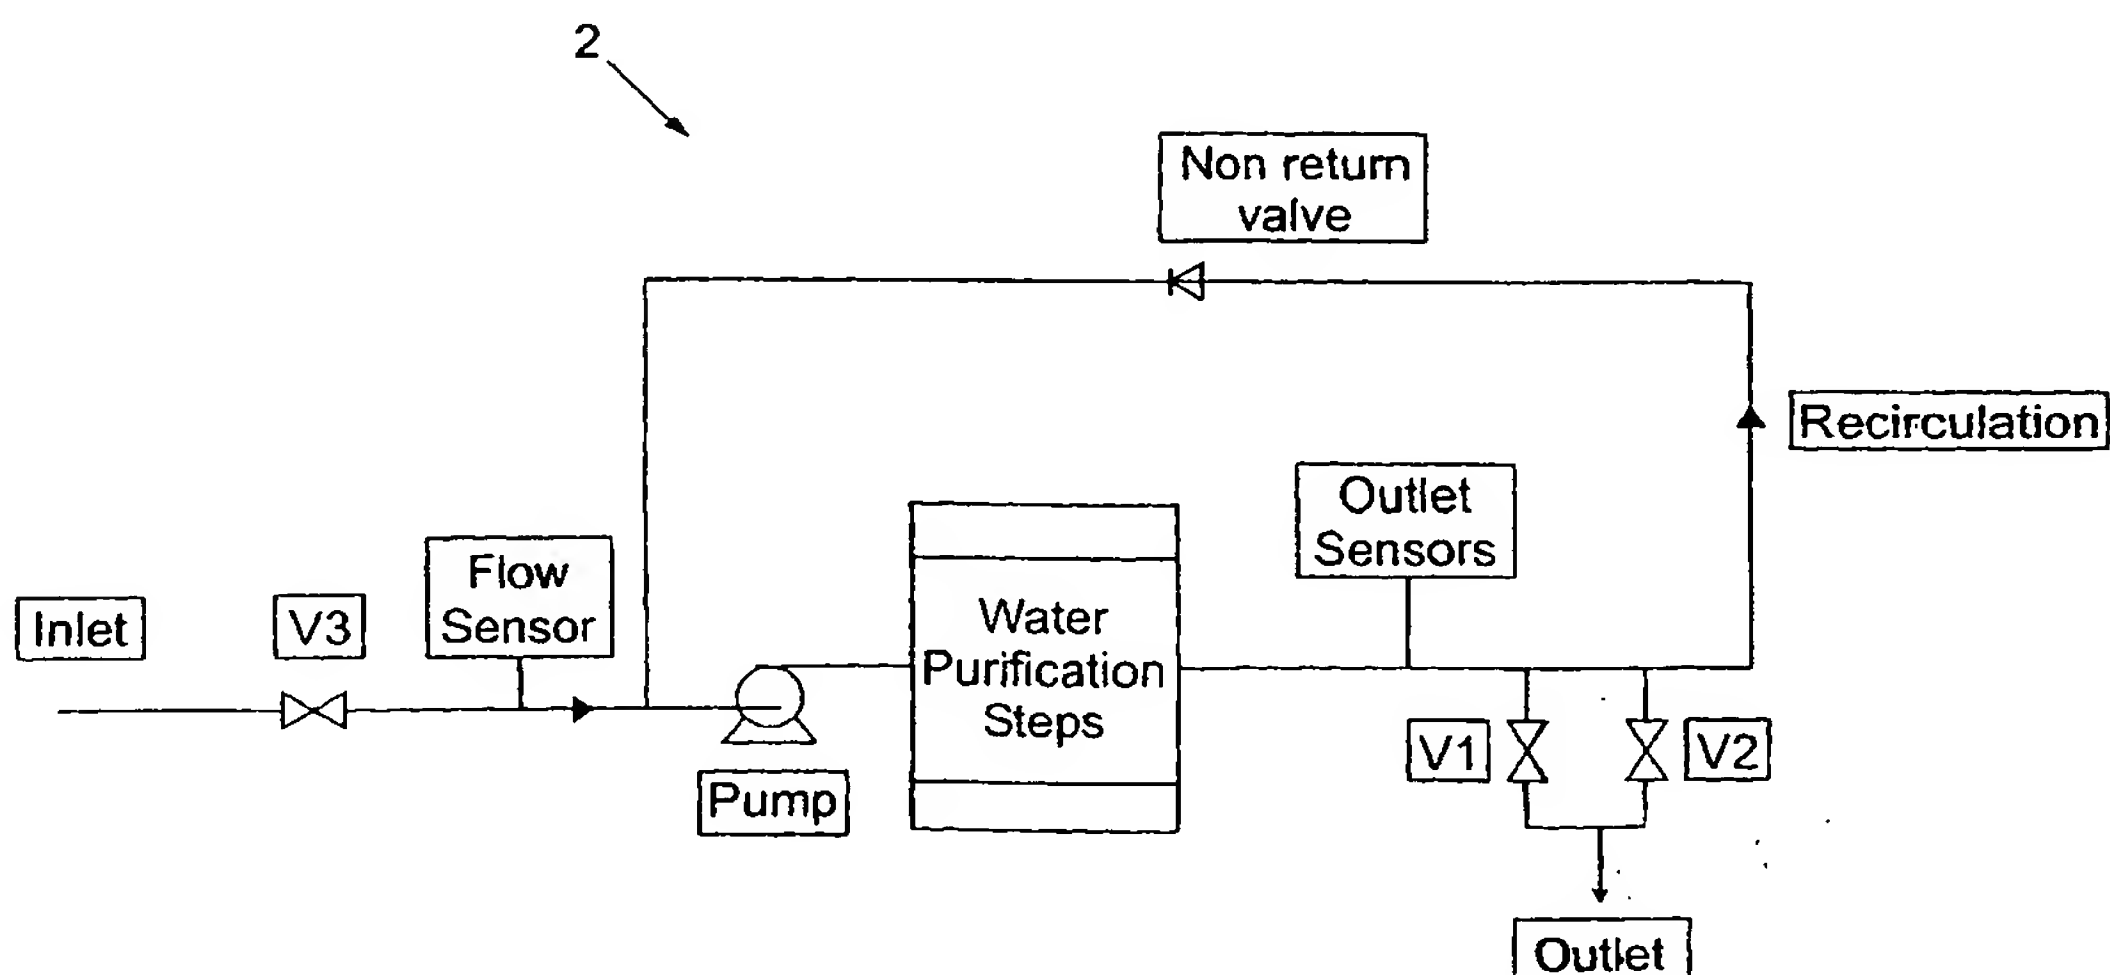

(57) Abstract: A water purification apparatus having an inlet and an outlet, and at least one water purification means thereinbetween, wherein the outlet includes at least a first and second water release means, the first release means being operable at a first flow rate, and the second release means being operable at a second flow rate, is described. Preferably, at least one water release means is operable at a relatively slow flow rate of generally up to 0.1 litre per minute, and at least one other water release means is operable at a relatively fast flow rate of, for example, up to 2 litres per minute. The present water purification apparatus provides the operator with the ability to very accurately obtain an exact volume of water desired.

WO 03/078328 A1